Section 0 – Executive Summary…2

Section 1 – Strategy and Objectives…3

Section 2 – FM BIM Execution Plan …6

Exhibit 2.A – Grading Fields and Procedures…13

Exhibit 2.B – Sample Project Schedule…16

Exhibit 2.C – Close Out Procedures…17

Section 3 – FM Data Requirements…19

Exhibit 3.A – RAM with Mapping…53

Exhibit 3.B – Facilities Data Integrator…58

Exhibit 3.C – Asset Type Matrix…60

Exhibit 3.D – FM Model Criteria …80

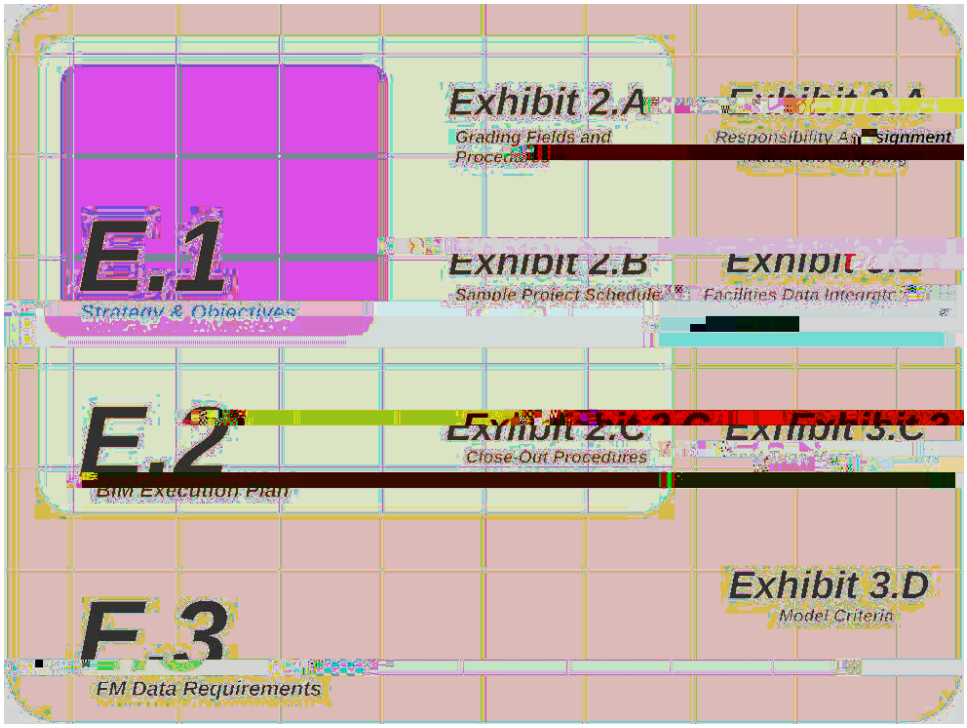

Section 0 - Executive Summary

Building Information Modeling (BIM) and Facilities Management (FM) Data Requirements

Section 1 – Strategy and Objectives

Knowing the strategy and objectives of Sam Houston State University (SHSU) in Building Information Management for Facilities Management (BIM-FM) is important for all project delivery teams (AEC + CxA) in order to satisfy the expectations and project requirements. The strategy and objectives section states that the BIM-FM process and documentation was undertaken by SHSU in order to provide direction and to equip project teams for facilities management data specification, collection, validation, and ultimately handover to SHSU. Handover deliverables shall be in a digital format and support operational objectives and efficiencies, such as import to the asset management (CMMS - Co9BIM Execution Plan (FM-BEP) 3Tc -0d)1(5Mr84()10d)1MmTc -0 c -0dageFM

Developing and communicating a clear plan for carrying out BIM-FM is necessary for each project team. The FM BIM Execution Plan (also referred to as a FM-BEP) section provides an outline and framework for planning how BIM-FM is to be accomplished at the project level. The overall intent is to allow and require project delivery team members to communicate to SHSU how they intend to meet the BIM-FM requirements. Each member of the AEC team shall submit a plan per the stated requirements in this section. The Facilities Data Integrator (FDI) receives each plan and reviews it according to the contracted section requirements for that team member. This plan outlines items such as: company roles, contact information, AEC team collaboration procedures, information exchange schedules, quality control procedures, and others. Submitted execution plans enable the Facilities Data Integrator (FDI), an agent of the owner (SHSU), the ability to better guide and manage teams to accomplish BIM-FM deliverables. The BEP allows teams to demonstrate how they will comply with the prescriptive requirements as well as the performance based requirements. This leaves room for project delivery teams to impose their own means and methods where prescriptive requirements do not exist.

Section 3 - FM Data Criteria

The FM Data Criteria is the largest section of the BIM-FM Requirements documents. It is a detailed specification and guide to understanding how project information shall be organized and delivered to SHSU. This is the most prescriptive part of the BIM-FM

FM Data Integrator will assist in this determination and will be the primary party representing the owner in the BEP approval process.

Section A: Project Information

Project Data

1. Project Owner:
2. Project Name:
3. Project Location & Address:
4. Contract Type/Delivery Method:
5. Concise Project Description: [number of facilities, general size, etc.]
6. Additional Project Information: [unique BIM project characteristics and requirements]
7. Project / Contract Numbers: [Contract Number, Task Order, Project Number, etc.]
8. Project Schedule / Phases / Milestones: [include BIM milestones, pre-design activities, major design reviews, stakeholder reviews, and other major events which occur during project lifecycle]

Project Schedule

Project Phase / Milestone	Estimated Start Date	Estimated Completion Date	Project Stakeholders Involved
X% Schematic Design			
X% Design Development			
X% Construction Documents			

Key Project Contacts

List of lead BIM contacts for each organization on the project.

Role	Organization	Contact Name	Location	E-Mail	Phone
Project Manager(s)					

2. BIM Use Staffing: [for each BIM & FM use selected, identify the team within the organization(s) who will staff and perform that use and estimate the personal time required. This helps the owner understand the level of effort (i.e., staffing plan) expected by the team members in delivery of the requirements.

BIM for FM Use	Organization	Number of Total Staff for Use	Estimated Worker Hours	Location(s)	Lead Contact
COBie					

Field

3. BIM for FM Delivery Schedule of Information Exchanges for Submission & Approval: [document the exchange of COBie and Model data that occurs during the project:]

Information Exchange	File Sender

3. Accuracy and Tolerances:
    a. *Note: At any time during the project where the data errors grow to a point above 10% of the entire data set; the owner reserves the right to take appropriate corrective action*

2. Attach documents intended for use in guiding coordination efforts. Guidelines should be at a minimum to the detail of BIM Forum MEP Spatial Coordination Requirements for BIM and have 1inch and above conduit modeled.

Section K: Update of the BEP

Ebeing created during the BIM
stage. This project schedule, should be mostly contributed to by the A
responsible for the final schedule that the AEC team will be held to. This s
by the Owner as part of the BIM Execution Phe owner's CMMS across
s" section of the grading standard will measure how many of the
ded in the data set. aExple

4. Quantity

At the beginning of the project the owner, with the assistance of the FDI, will conceptually estimate the number of rows of information per tab that will be in the final COBie spreadsheet. This number will be divided into a per month requirement that is loaded into the deliverable schedule. By requiring a quantity of rows delivered per month, the owner can insure that the deliverable is being continually progressed by team members at an appropriate interval.

The Quantity grade, then, will measure the quantity of populated rows in each tab of the COBie spreadsheet. Unlike the Required grading standard, rows do not need to be fully populated to add to the Quantity count, because that aspect is graded elsewhere. The number of required rows to be completed per tab per month will be taken directly from the schedule.

õ

5. Quality Control / Quality Assurance

5 Re>-4.[(5.)0 Tw165DD835 /Span<T /SBrr<T 0 T5(ed)1.e1.162j ETw 8.Tc 0.J 0

It is necessary that all information entered into COBie accurately reflects the field conditions. If data accuracy is inconsistent, O&M objectives will be frustrated and the deliverable will be of little value to the owner. The Accuracy grade will measure the correctness of the data. Cells containing inaccurate information will be marked as an error.

The BIM Execution Plan shall address field data accuracy procedures. Field data shall be independently verified and/or sampled to ensure accuracy. This can be accomplished by a variety of means. One example is to have the

		Total	Month 1 Dec-13	Month 2 Jan-14	Month 3 Feb-14	Month 4 Mar-14	Month 5 Apr-14	Month 6 May-14	Month 7 Jun-14	Month 8 Jul-14	Month 9 Aug-14	Month 10 Sep-14	Month 11 Oct-14	Month 12 Nov-14	Month 13 Dec-14	Month 14 Jan-14	Month 15 Feb-15	Month 16 Mar-15
	Required Categories	8	2				4	6	7	7	8	8	8					
1-Contact	Required Fields/Columns	14	14				14	14	14	14	14	14	14					
	Proposed Quantity (Rows)	300	10				25	40	50	60	75	90	105					
	Required Categories	1	1															
2-Facility	Required Fields/Columns	5	5															
	Proposed Quantity (Rows)	1	1															
	Required Categories	3	3															
3-Floor	Required Fields/Columns	6	6															
	Proposed Quantity (Rows)	4	4															
	Required Categories	65	65															
4-Space	Required Fields/Columns	10	10															
	[redacted]																	
	Required Categories	5		2	3	5												
	Required Fields/Columns	6		6	6	6												
	Proposed Quantity (Rows)	50		20	30	50												
	Required Categories	80		20	40	80	5	10	16	32	48	64	80					
	Required Fields/Columns	17		6	6	6	17	17	17	17	17	17	17					
	Proposed Quantity (Rows)	100		25	50	100	5	10	20	40	60	80	100					
	Required Categories	100		25	50	100	20	5	10	20	40	60	80	100	100	100	100	
	Required Fields/Columns	12		7	7	7	5	3	4	5	6	7	8	9	10	11	12	
	Proposed Quantity (Rows)	1500		375	750	1500	300	75	150	300	600	900	1200	1500	1500	1500	1500	
	Required Categories	20		5	10	20												
	Required Fields/Columns	6		6	6	6												
	Proposed Quantity (Rows)	25		5	15	25												
	[redacted]																	
	Required Categories	100																
	Required Fields/Columns	13												13	13	13	13	13
	Proposed Quantity (Rows)	200												40	80	120	160	200
	Required Categories	10		1	1	1	2	2	2	2	2	2	3	4	5	6	8	10
	Required Fields/Columns	10		10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
	Proposed Quantity (Rows)	1200		20	40	100	130	160	190	220	250	280	380	500	650	800	1000	1200
	[redacted]														O&M -->		Cx -->	
	Required Categories	400								40	80	120	160	200	240	280	340	400
	Required Fields/Columns	8								8	8	8	8	8	8	8	8	8
	Proposed Quantity (Rows)	500								50	100	150	200	250	300	350	425	500
	Required Categories	1														1	1	
	Required Fields/Columns	9														9	9	
	Proposed Quantity (Rows)	50														25	50	

Exhibit 2. C – CloseOut Procedures

End User Review & Acceptance

Test imports of the COBie data and documents may be performed leading up to final acceptance and review. However, once the COBie file has been successfully test imported into _COMPANY_ Facilities Data Integrator (FDI) shall notify the Owner. The Owner then shall notify each end user to review assets identified as belonging to their respective department (organization). Areas of particular interest in review shall include those items that are shared between multiple end users/departments; ex: large Utility Water Valves should be reviewed by both Facilities Plumbing Maintenance Staff

reports with the AEC team on a prescribed and regular basis. The basic premise here is that progressive elaboration and "building up" of the FM data occurs over multiple phases of the project duration.

Final Handover Deliverables Include (but may not be limited to):

- Project team compliance and conformance to the FM Data requirements (the FM Data Specification).
- COBie Version 2.24 file (latest approved version) with all documents in one folder.
- Record Set/As-built models (including all native files and one federated NWD file).
- Facilities Model with saved viewpoints of all COBie components per the FM Data requirements (the FM Data Specification).

Exhibit 3.B - Facilities Data Integrator Role

Role:

E*f* Provide necessary minor adjustments to models to make them ligh

Asset Group / COBie "Type Category"	System
DOOR POSITION SWITCH	ACCESS
EXT RDR	ACCESS
EXTERIOR DOORS, KEYED	ACCESS
INT RDR	ACCESS
LOCK	ACCESS
LOCKBOX	ACCESS
OPENER	ACCESS
SPECIAL ACTION DOORS	ACCESS

PKL LIGHT	ELEC
POWER EQUIPMENT	ELEC
PULL BOX	ELEC
SOLAR/PV EQUIPMENT	ELEC
SURGE PROTECTORS	ELEC
UPS SYSTEM	ELEC
XFMR	ELEC
DEFIBRILLATOR	EMERGENCY
EMG LIGHT	EMERGENCY
EMG PHONE	EMERGENCY
EYEWASH	EMERGENCY
FIRST AID	EMERGENCY
FUME HOOD	EMERGENCY
MISC EMERGENCY EQUIPMENT	EMERGENCY
SF SHOWER	EMERGENCY
ANNUNCIATORS	FIRE ALARM
DAMPERS	FIRE ALARM
FIRE ALARM DEVICES	FIRE ALARM
FIRE ALARM PANEL	FIRE ALARM
FIRE INITIATING DEVICES	FIRE ALARM
FIRE DEPARTMENT CONNECTIONS	FIRE SUPPRESSION
FIRE EXTINGUISHERS	FIRE SUPPRESSION
FIRE HYDRANTS	FIRE SUPPRESSION
FIRE SUPPRESSION SYSTEM	FIRE SUPPRESSION
SPRINKLERS	FIRE SUPPRESSION
APPLIANCE	FOOD SERVICE
COLD TABLE	FOOD SERVICE
CONVEYER	FOOD SERVICE
COOK TOP	FOOD SERVICE
COOLER	FOOD SERVICE
FREEZER	FOOD SERVICE
ICE MAKER	FOOD SERVICE
MISC	FOOD SERVICE
OVEN	FOOD SERVICE
VENT HOOD	FOOD SERVICE
WASH STATIONS	FOOD SERVICE
AHU	HVAC
AIR VALVE	HVAC
ATU	HVAC
BOILERS	HVAC
CHILLERS	HVAC
COMPRESSORS	HVAC
CONTROL DEVICES	HVAC
CONTROLLER	HVAC
COOLING TOWER	HVAC
DHUM	HVAC
DXU	HVAC

ERU	HVAC
FAN	HVAC
FCU	HVAC
FILTERS	HVAC
GRILLS	HVAC
HEAT EXCHANGERS	HVAC
HEATERS	HVAC
HUMIDIFIER	HVAC
OAHU	HVAC
PKG UNIT	HVAC
PUMP	HVAC
SENSORS	HVAC
SEPERATORS	HVAC
STRAINER	HVAC
UNIT HEATER	HVAC
VFD	HVAC
WATER VALVES	HVAC
HAND BOXES	IRRIGATION
IRRIGATION SYSTEM	IRRIGATION
CLEAN OUT	PLUMB
DISPOSAL	PLUMB
DRAIN	PLUMB
FAUCETS	PLUMB
FLUSH VALVES	PLUMB
PURIFIERS	PLUMB
RPZ	PLUMB
SINKS	PLUMB
TRAPS	PLUMB
URINALS	PLUMB
WATER CLOSET	PLUMB
WATER FOUNTAIN	PLUMB
WATER HEATER	PLUMB
ANIMAL EQUIPMENT	RESEARCH
BIO HAZARD EQUIPMENT	RESEARCH
INCUBATORS	RESEARCH
LAB EQUIPMENT	RESEARCH
LAB STERILIZER	RESEARCH
RESEARCH EQUIPMENT	RESEARCH
SECURITY CAMERAS	RESEARCH
SECURITY PANEL	RESEARCH
BOLLARDS	SITE
LIGHTING POLES	SITE
SIGN	SITE
TRAFFIC CONTROL	SITE
WASTE EQUIPMENT	SITE